

How to add a sensor / actuator to neOCampus ?

# neOCampus IoT API for end-devices

*End-devices API*

*Dr Thiebolt François, [thiebolt@irit.fr](mailto:thiebolt@irit.fr)*

Modification table

Date	Note
Mar.20	additional topics conventions
Feb.20	added <b>access</b> class topic
Jan.20	added <b>pressure, rain, wind</b> ... classes (metropole weather station)
Mar.18	added <b>display</b> class messages
Nov.17	initial release

## Abstract

This guide explains how to authenticate against the neOCampus IoT chain and then how to publish / subscribe data through the neOCampus **MQTT broker** and its associated device management application named **sensOCampus**.

---

## Table of contents

Abstract	1
<b>End-devices</b>	<b>4</b>
sensOCampus credentials API	5
get_credentials	5
get_config	5
summary	6
<b>MQTT topics conventions</b>	<b>7</b>
msg to a command topic	7
msg to a class topic	8
unitID and subID	9
scenario example	9
sensors auto detection and messages publishing	10
sensors and actuators uniqueness	10
neOCampus MQTT sandbox	11
Class topics and command topics	12
device	14
publish	14
subscribe	14
temperature / luminosity / co2 / humidity / pressure / weight / uv	16
publish	16
subscribe	16
rain	18
publish	18
subscribe	18
wind	20
publish	20
subscribe	20
energy	22
publish	22
subscribe	22
camera	24
digital	25
publish	25
subscribe	25
noise	26
publish	26
subscribe	26
lighting	28
publish	28

subscribe	28
dali	29
shutter	30
publish	30
subscribe	30
display	31
publish	31
subscribe	31
access	33
publish	33
subscribe	33
<b>Annexe - A</b>	<b>35</b>
A - 1 ESP8266 credentials sample code	35
A - 2 sensOCampus configuration U4/302	37


## End-devices

What we call a **device (or end-device)** is a piece of **hardware connected to a network**. Such a device may encompass one to several sensors / actuators. It is devices' firmware responsibility to publish sensors values to the proper topic and to subscribe to relevant topics.



In the upper example, the device is a Raspberry Pi that could be connected to either a wired / wireless network. Each kind of sensor / actuators map to a topic class. However, to be able to publish / subscribe to the MQTT broker, the device's client needs credentials. To obtain these credentials, you first need to:

1. declare device's MAC address to the neOCampus technical staff,
2. interact with sensOCampus application that will give you your credentials.

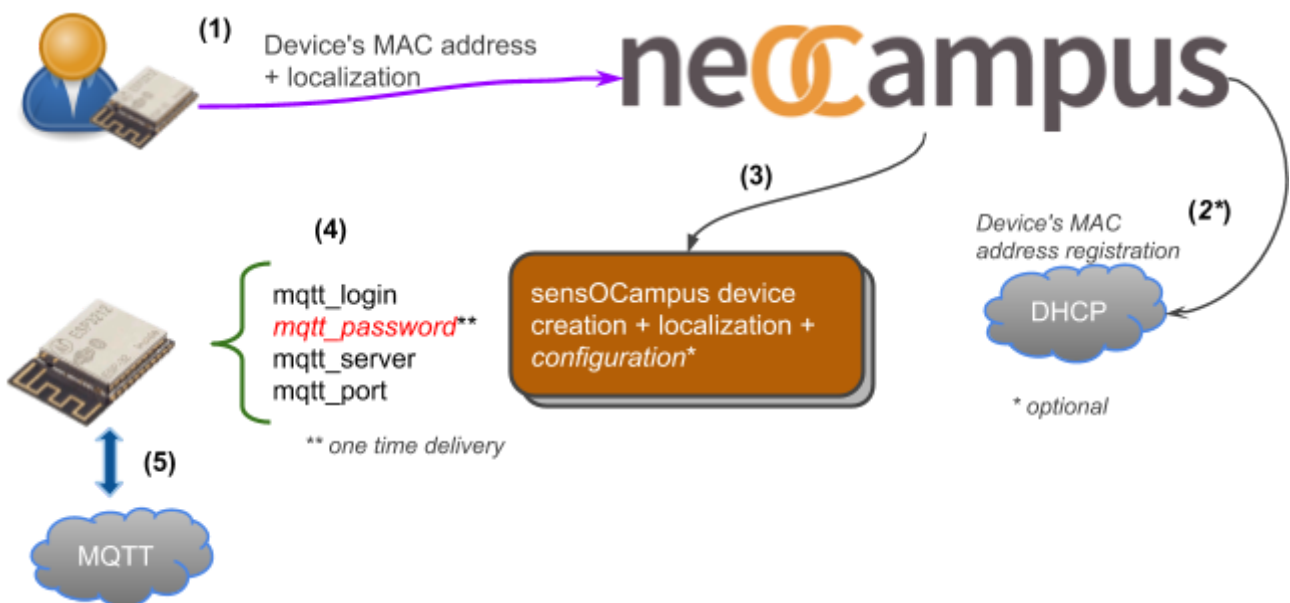

sensOCampus is the main end-devices management application developed for neOCampus. It takes care of managing the device's own specific setup (MAC, configuration, status, topics etc).

## sensOCampus credentials API

We below describe the various involved steps that end-devices need to undertake with the sensOCampus application to retrieve their credentials.

1. `get_credentials` → will give your device its mqtt related credentials,
2. `get_config` → your device will be given a **MQTT base topic** along with optional configuration registered for each peculiar device at the sensOCampus level.

### get\_credentials

```
https://sensocampus.univ-tlse3.fr/device/credentials?mac=<device_mac_addr>
```

... response will be in JSON format

```
{
  "login" : "<mqtt_login>",
  "password" : "<mqtt_password>",
  "server" : "neocampus.univ-tlse3.fr",
  "port" : 1883
}
```

Please pay attention to the facts that:

- **password** field is a one-time delivery parameter → if you lose it, you need to apply for new credentials at the neOCampus technical staff,
- **"server"** and **"port"** fields are **optionals** → you ought to have these default values in your code if sensOCampus does not deliver them to your device.

It's the device's own responsibility to save these credentials in some non volatile hardware. If you apply for a credentials renewal operation, both login and password will change.

### get\_config

*prepare HTTPS request with previously delivered credentials (https\_auth) ...*

```
get https://sensocampus.univ-tlse3.fr/device/config
```

... response will be in JSON format

```
{
  'zones': [],
  'topics': ['bu/hall']
}
```

In this simple example, we have no specific configuration (empty zones) and we must take into account the **topics** field as **BASE\_TOPIC**.

*Note: in case 'topics' contains multiple fields, just select the first one*

## summary

You now have the following:

login	"<mqtt_login>"
password	"<mqtt_password>"
server	neocampus.univ-tlse3.fr
port	1883 or 8883 (tls)
BASE_TOPIC	bu/hall

Later, this BASE\_TOPIC means that you've been granted the following topics rules:

bu/hall/+	publish & subscribe (i.e write & read)
bu/hall/+/command	subscribe (i.e read)

In the next section, we'll start to talk about the MQTT conventions that apply to neOCampus.

# MQTT topics conventions

The following describes various rules about topics conventions that apply to the neOCampus IoT.

- Each **end-device** get specified a **BASE\_TOPIC** through its `get_config` procedure,
- A **BASE\_TOPIC** is named accordingly to `<building>/<room>`, eg. `u4/302`
- Each sensor / actuator belongs to a **class** (e.g temperature, co2, shutter ...) that is **appended** to the device's **BASE\_TOPIC** (e.g `bu/hall/temperature`), named a **class topic**,
- Each sensor / actuator subscribe to a **command topic** with a **command** token appended to the class topic (e.g `bu/hall/temperature/command`)
- The **end-device** itself publish to a **class topic** (e.g `bu/hall/device`) and subscribe to a **command topic** (e.g `bu/hall/device/command`)
- Each **end-device** is identified by its **MAC\_ADDRESS**,
- A **sensor** is either identified by an ID specified at sensOCampus server or automatically discovered at startup (e.g i2c scan). Sensors automatically discovered have an ID prefixed with `auto` (e.g `'auto_C32F'` with last 2 digits being end of device's `MAC_ADDR`),
- An **actuator** is identified by an ID specified at sensOCampus server (e.g `u4/302/shutter` with 3 shutters identified as "front", "center" and "back"),
- topics prefixed with `'_'` are of specific use (e.g `_lora/...` or `_weather/...`),
- For outside end-devices located **within** the campus (e.g toulouse metropole weather station), **BASE\_TOPIC** is `outside/<class>` (e.g `outside/wind` or `outside/access---`access control gates of our university),
- For abroad end-devices (i.e not located within the campus) **BASE\_TOPIC** is `abroad/<location>` e.g `abroad/carcassonne/<building>/<room>`
- JSON frames' keys are mostly lower case ;)



Hence, for each device, each sensor and each actuator, there's:

- a **class topic** to publish to → `BASE_TOPIC / CLASS`
- a **command topic** to subscribe to → `BASE_TOPIC / CLASS / command`


## msg to a command topic

Whenever a message is sent to a **command topic** (e.g `bu/hall/shutter/command`), the JSON frame **OUGHT** to contain a **'dest'** field.

- `'dest' : "all"` → message is for all of those that subscribed to this command topic,
- `'dest' : "<ID>"` → message is only for those whose ID matches

Example, if you wish to send an order to a specific **device**, `'dest'` will contain its **MAC\_ADDRESS**. If you wish to send an order to a shutter, `'dest'` will contains its ID specified at the sensOCampus interface ("front" for example).

✓ Sending order to a shutter (with proper mqtt login / passwd)

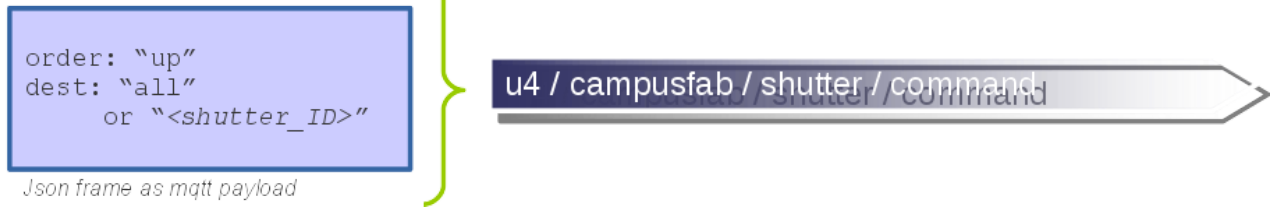

*Json frame as mqtt payload*

In example above, all shutters from `u4 / campusfab` will receive the "up" order thus opening all of them.

### msg to a class topic

Whenever a device, a sensor or an actuator send a message to a **class topic** (e.g `bu/hall/noise` or `u4/cfab/device`), associated JSON frame **OUGHT** to contains a 'unitID' field whose value reflect the sender's identity:

- 'unitID' : "<ID>"

'unitID' : "00:08:a2:1f:cb:3f"	'unitID' : 'auto_CB3F'	'unitID' : "front"
sender is a device. <i>Note</i> that for compatibility, a 'unit' key with the same value may be added.	sender is an auto-detected sensor usually associated with 'subID' : '<i2c_addr>' <i>Note</i> the last 2 digits are from device's MAC_ADDR	sender may be a sensor or actuator declared at sensOCampus level. <i>Note</i> a 'subID' will be added if it has been declared.



*Json frame as mqtt payload*

In the example above, a shutter identified by its 'unitID' sent back its status through the class topic.



**REMEMBER:** when declaring several devices in the same room (e.g `u4/campusfab`), it is the users' responsibility to manage identity uniqueness of sensors or actuators declared at the sensOCampus level.



### unitID and subID

Whenever a sensor is automatically detected at startup (e.g i2c scan), it gets automatically attributed a 'unitID' (identity) and a 'subID' (informative only field ---e.g i2c addr)


Example:

unitID	subID	Note
'unitID' : 'auto_CB8F'	'subID' : '32'	At least one auto-detected sensor with i2c addr 0x20. Device's MAC_ADDR end with CB8F
'unitID' : 'inside'	'subID' : 'ilot1'	A sensor or actuator declared at sensOCampus

Note: the nature of the sensor will be revealed according to it class topic publishing

### scenario example

Considering the following device featuring 3 x i2c sensors.

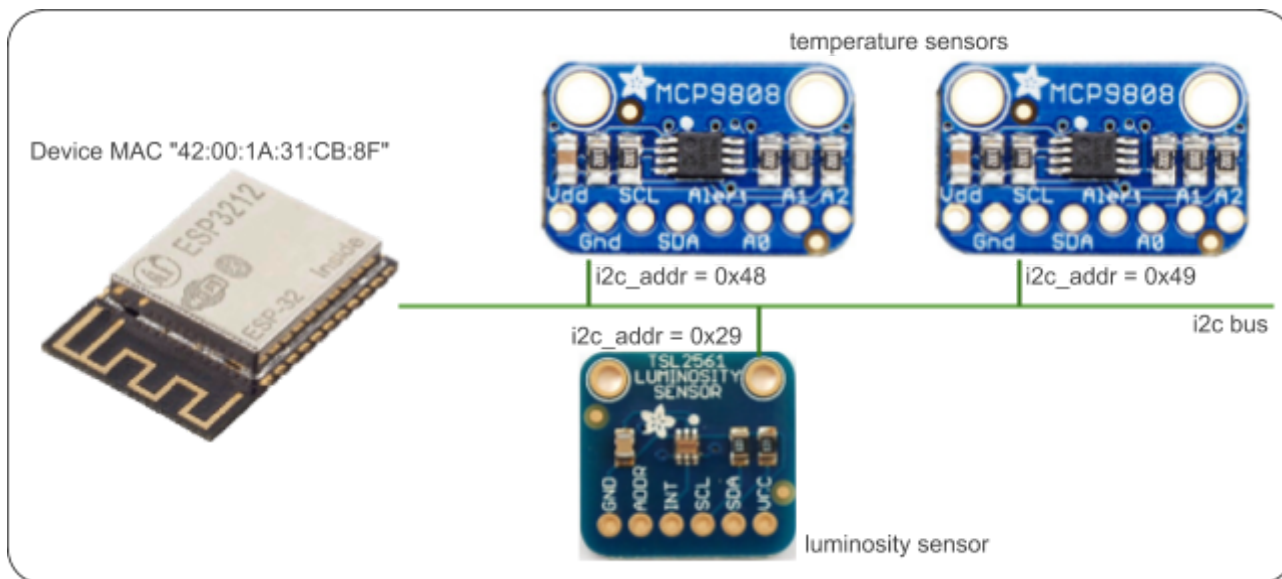

This will result in the following identity of sensors:

'unitID'	'subID'	class & command topics
auto_CB8F	41	BASE_TOPIC/luminosity BASE_TOPIC/luminosity/command
auto_CB8F	72	BASE_TOPIC/temperature BASE_TOPIC/temperature/command
auto_CB8F	73	BASE_TOPIC/temperature BASE_TOPIC/temperature/command

### **sensors auto detection and messages publishing**

Each sensor value is sent as a separate message. It means for example that if you feature 8 temperature sensors on the same device, you'll have 8 different messages when it comes to push the data.

### **sensors and actuators uniqueness**

It is the IoT manager's responsibility to ensure unitID uniqueness at the room-level.

Of course, if you add to the same room two devices whose MAC\_ADDR last 2 digits are the same ... use another device ;)

## neOCampus MQTT sandbox

To ease testing of your sensor / actuator, you may give a try to the neOCampus MQTT sandbox:

<b>login</b>	test
<b>passwd</b>	<ask for it!>
<b>server</b>	neocampus.univ-tlse3.fr
<b>port</b>	1883
<b>BASE_TOPIC</b>	TestTopic/#

Hence, you won't need the sensOCampus credentials and you are free to create / read / write in any topic you want considering it is BASE\_TOPIC biased.

### example topics



**Base** : defined at device registration time according to location

*e.g u4 / 300 or bu / hall ...*

**Type** : kind of sensor / actuator (module) defined by sensOCampus or automagically detected

*e.g shutter, luminosity, temperature, sound, lighting ...*

**Command** : to send orders to a sensor / actuator (module)

*e.g orders to shutter like UP, STOP, DOWN*

BASE_TOPIC	Description
_lora	raw end-devices values from LoRaWAN server
_weather	Toulouse metropole raw values
outside	UT3 end-devices located outdoor
abroad	outside of UT3 end-devices

## Class topics and command topics

Below is a description of the currently existing classes:

Class	Publish	Subscribe
device	BASE_TOPIC/device	BASE_TOPIC/device/command
temperature	BASE_TOPIC/temperature	BASE_TOPIC/temperature/command
luminosity	BASE_TOPIC/luminosity	BASE_TOPIC/luminosity/command
humidity	BASE_TOPIC/humidity	BASE_TOPIC/humidity/command
co2	BASE_TOPIC/co2	BASE_TOPIC/co2/command
energy	BASE_TOPIC/energy	BASE_TOPIC/energy/command
camera	BASE_TOPIC/camera	BASE_TOPIC/camera/command
digital	BASE_TOPIC/digital	BASE_TOPIC/digital/command
noise	BASE_TOPIC/noise	BASE_TOPIC/noise/command
weight	BASE_TOPIC/weight	BASE_TOPIC/weight/command
uv	BASE_TOPIC/uv	BASE_TOPIC/uv/command
rain	BASE_TOPIC/rain	BASE_TOPIC/rain/command
wind	BASE_TOPIC/wind	BASE_TOPIC/wind/command
lighting	BASE_TOPIC/lighting	BASE_TOPIC/lighting/command
dali	BASE_TOPIC/lighting	BASE_TOPIC/lighting/command
shutter	BASE_TOPIC/shutter	BASE_TOPIC/shutter/command
display	BASE_TOPIC/display	BASE_TOPIC/display/command
access	BASE_TOPIC/access	BASE_TOPIC/access/command

*e.g temperature sensor PUBLISH its value in BASE\_TOPIC/temperature*

*... and it also SUBSCRIBE to BASE\_TOPIC/temperature/command to receive orders (e.g frequency acquisition change)*

## device

Basis of all sensors / actuators, end-devices are connected to a network and are identified via their MAC address.

Each device ought to be able to:

- 'publish' some information (e.g status)
- 'subscribe' to a command topic

## publish

BASE_TOPIC/device	JSON frame
status	is <b>automatically</b> published every 30mn (default) <pre>{   'unitID' : &lt;MAC_ADDR&gt;,   'status': "OK",   &lt;optional fields&gt; }</pre>

Note: there's no 'values' because a device is not supposed to deliver such items.

The '**status**' key:

<b>OK</b>	normal operation
<b>FAIL</b>	an error occurred

Note: since this is only a user informative message, you can send any string you want!

## subscribe

BASE_TOPIC/device/command	JSON frame
order	<pre>{   'dest' : &lt;MAC_ADDR&gt;,   'order' : "&lt;action&gt;",   &lt;optional fields&gt; }</pre>
upgrade (firmware/application)	<pre>{   'dest' : &lt;MAC_ADDR&gt;,   'order' : "upgrade",   &lt;optional fields&gt; }</pre> <p>optional fields may contain  - 'value' → url to firmware  (e.g 'value' : 'http://xxx.bin')</p>
frequency change order	<pre>{   'dest' : &lt;MAC_ADDR&gt;,   'order' : "frequency",   'value' : &lt;integer seconds&gt; }</pre>

Note: 'frequency' is about 'status' delivery, not 'values' (whose message does not exists).

'order' command possible actions:

<b>reset</b>	reset application configuration and restart app.
<b>restart</b>	restart application
<b>reboot</b>	reboot the whole board
<b>update</b>	update application configuration (i.e json config from sensOCampus)
<b>upgrade</b>	upgrade firmware / application and restart
<b>reinstall</b>	[Raspberry Pi] start whole SDCard reinstallation
<b>status</b>	force immediate delivery of a status report to its class topic
<b>frequency</b>	change frequency of <b>status report</b> delivery (min. 10mn, max 6h)



Note that status report is automatically published for each device while it is only published on explicit request for the sensors and actuators.

**temperature / luminosity / co2 / humidity / pressure / weight / uv**

These classes of sensors send back ambient parameters. They are able to change their acquisition frequency and they transmit both 'value' of the sensor along with its physical unit (e.g 'value\_units' : 'celsius')

**publish**

BASE_TOPIC / CLASS	JSON frame
status	<p>is published on request</p> <pre>{   'unitID' : &lt;ID&gt;,   'frequency': &lt;acquisition frequency seconds&gt;,   &lt;optional fields&gt; }</pre> <p>optional fields may contain</p> <ul style="list-style-type: none"> <li>- 'sensors' → declared sensors</li> <li>- 'i2c_sensors' → automatically discovered sensors</li> </ul>
value	<p>is <b>automatically</b> published every &lt;freq&gt; seconds</p> <pre>{   'unitID' : &lt;ID&gt;,   'value': &lt;value&gt;,   'value_units' : "&lt;string&gt;"   &lt;optional fields&gt; }</pre> <p>optional fields may contain</p> <ul style="list-style-type: none"> <li>- 'subID' → either i2c addr of sensor or explicit value set at sensOCampus level</li> </ul>

**subscribe**

BASE_TOPIC/CLASS/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "status" }</pre>
frequency change order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "frequency",   'value' : &lt;integer seconds&gt; }</pre>
immediate acquisition order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "acquire" }</pre>

'order' command possible **actions**:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>frequency</b>	change frequency of status report delivery (min. 10mn, max 6h)
<b>acquire</b>	force immediate delivery of sensor value(s).



## rain

This class of sensor sends back a broad range of values and values units (like [energy](#)). Beware that you could face changes in either name of units or number of items in lists (of course both will get consistent anyway).

- 'value' : [ '0.0', '0.0', '0.0', '0.0', '0.0', '0.0' ]
- 'value\_units' : [ 'stormRain\_cm', 'dayRain\_cm', 'rain24\_cm', 'hourRain\_cm', 'rainRate\_cm\_per\_hour', 'monthRain\_cm' ]

## publish

BASE_TOPIC / rain	JSON frame
status	<p>is published on request</p> <pre>{   'unitID': &lt;ID&gt;,   'frequency': &lt;acquisition frequency seconds&gt;,   &lt;optional fields&gt; }</pre> <p>optional fields may contain</p> <ul style="list-style-type: none"> <li>- 'sensors' → declared sensors</li> <li>- 'i2c_sensors' → automatically discovered sensors</li> </ul>
value	<p>is <b>automatically</b> published every &lt;freq&gt; seconds</p> <pre>{   'unitID': &lt;ID&gt;,   'value': [ &lt;value&gt;, &lt;value&gt; ... ],   'value_units': [ "&lt;string&gt;", "&lt;string&gt;" ... ]   &lt;optional fields&gt; }</pre> <p>optional fields may contain</p> <ul style="list-style-type: none"> <li>- 'subID' → either i2c addr of sensor or explicit value set at sensOCampus level</li> </ul>

## subscribe

BASE_TOPIC/rain/command	JSON frame
send status order	<pre>{   'dest': &lt;ID&gt;,   'order': "status" }</pre>
frequency change order	<pre>{   'dest': &lt;ID&gt;,   'order': "frequency",   'value': &lt;integer seconds&gt; }</pre>

---

immediate acquisition order	{ 'dest' : <ID>, 'order' : "acquire" }
-----------------------------	---

'order' command possible actions:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>frequency</b>	change frequency of status report delivery (min. 10mn, max 6h)
<b>acquire</b>	force immediate delivery of sensor value(s).

## wind

This class of sensor sends back a broad range of values and values units (like [energy](#)). Beware that you could face changes in either name of units or number of items in lists (of course both will get consistent anyway).

- 'value' : [ 326.25, 3.79, 9.66, 315.0 ]
- 'value\_units' : [ 'windDir', 'windSpeed\_kph', 'windGust\_kph', 'windGustDir' ]

Unless otherwise stated, wind direction are degrees (direction where the wind is blowing to) and wind speed are kilometers per hour.

## publish

BASE_TOPIC / wind	JSON frame
status	<p><i>is published on request</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'frequency': &lt;acquisition frequency seconds&gt;,   &lt;optional fields&gt; }</pre> <p><i>optional fields may contain</i></p> <ul style="list-style-type: none"> <li>- 'sensors' → declared sensors</li> <li>- 'i2c_sensors' → automatically discovered sensors</li> </ul>
value	<p><i>is <b>automatically</b> published every &lt;freq&gt; seconds</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'value': [ &lt;value&gt;, &lt;value&gt; ... ],   'value_units' : [ "&lt;string&gt;", "&lt;string&gt;" ...]   &lt;optional fields&gt; }</pre> <p><i>optional fields may contain</i></p> <ul style="list-style-type: none"> <li>- 'subID' → either i2c addr of sensor or explicit value set at sensOCampus level</li> </ul>

## subscribe

BASE_TOPIC/wind/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "status" }</pre>
frequency change order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "frequency",   'value' : &lt;integer seconds&gt; }</pre>

---

immediate acquisition order	{ 'dest' : <ID>, 'order' : "acquire" }
-----------------------------	---

'order' command possible *actions*:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>frequency</b>	change frequency of status report delivery (min. 10mn, max 6h)
<b>acquire</b>	force immediate delivery of sensor value(s).

## energy

Power and energy consumption is usually gathered from Modbus energy meters. This kind of sensor can't be automatically detected, hence requiring a sensOCampus definition.

Moreover, each sensor gives a bunch a data (power, freq, energy, power\_factor, intensity, voltage ...) all packed as a list in the 'value' field along with their corresponding units in 'value\_units':

- 'value' : ['158426.00', '158420.00', '235.22', '0.14', '20.00', '20.00', '30.00', '0.70']
- 'value\_units' : ['Wh', 'Ea+', 'V', 'A', 'W', 'VAR', 'VA', 'cosPhi']

## publish

BASE_TOPIC / energy	JSON frame
status	<p>is published on request</p> <pre>{   'unitID' : &lt;ID&gt;,   'frequency' : &lt;acquisition frequency seconds&gt;,   'backend' : &lt;backend type&gt;,   &lt;optional fields&gt; }</pre> <p>optional fields may contain</p> <ul style="list-style-type: none"> <li>- 'link' : "/dev/usb0" (for example),</li> <li>- 'link_speed' : 9600,</li> <li>- 'nodes' : [ (&lt;modbus addr&gt;, &lt;meter_name&gt;), ... ]</li> </ul>
value	<p>is <b>automatically</b> published every &lt;freq&gt; seconds</p> <pre>{   'unitID' : &lt;ID&gt;,   'value': [ &lt;value&gt;, &lt;value&gt; ... ],   'value_units' : [ "&lt;string&gt;", "&lt;string&gt;" ... ] }</pre> <p>Note: see above for a description of 'value' and 'value_units'</p>

<backend type> possible values:

<b>modbus</b>	either RS-485 or TCP modbus energy meter
<b>rf868</b>	868MHz energy meter (from consOCampus project)
<b>unknown</b>	as you guess ;)

## subscribe

BASE_TOPIC/energy/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "status" }</pre>
frequency change order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "frequency",   'value' : &lt;integer seconds&gt; }</pre>
immediate acquisition order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "acquire" }</pre>

'order' command possible *actions*:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>frequency</b>	change frequency of status report delivery (min. 10mn, max 6h)
<b>acquire</b>	force immediate delivery of sensor value(s).

camera



## digital

This class of sensor is related to everything that is relevant to digital inputs (e.g open window detector, motion sensor etc). This kind of sensor ought to get declared at the sensOCampus level.

For each event on a digital input (i.e rising\_edge and falling\_edge), a message will be sent immediately (i.e no timer involved but direct hardware events management).

## publish

BASE_TOPIC / digital	JSON frame
status	<p><i>is published on request</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'sensors': [[101, "button", "ilot1"], [102, "presence", "ilot1"]] }</pre> <p><i>'sensors' : [ (input, type, subID), ... ] these values are coming from sensOCampus definitions</i></p>
value	<p><i>is <b>automatically</b> published for each event on input(s)</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'value': 1,   'input' : 102,   'type' : "presence",   'subID' : "ilot1" }</pre>

## subscribe

BASE_TOPIC/digital/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "status" }</pre>

'order' command possible [actions](#):

<b>status</b>	force immediate delivery of a status report to its class topic
---------------	--



## noise

This sensor amplifies sound from a microphone and sets a threshold on a comparator delivering pulses when sound intensity goes beyond. Pulses count are recorded over a sliding window giving their total number for an elapsed time (default 5s). If this total number of pluses is higher than a user defined threshold, then a noise message is sent.

Thus, this sensor is driven by two threshold:

- **'sensitivity'** → 0 to 100%. Set DAC output to the comparator,
- **'threshold'** → noise limit (pulses count).

## publish

BASE_TOPIC / noise	JSON frame
status	<p><i>is published on request</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'sensitivity' : &lt;0 to 100%&gt;,   'threshold' : &lt;integer&gt;,   &lt;optional fields&gt; }</pre> <p><i>optional fields may contain</i></p> <ul style="list-style-type: none"> <li>- '_scan_window' → size of sliding window</li> </ul>
value	<p><i>is <b>automatically</b> published upon noise limit reached</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'value': &lt;sum pulses count&gt;,   'value_units' : "pulses"   &lt;optional fields&gt; }</pre> <p><i>optional fields may contain</i></p> <ul style="list-style-type: none"> <li>- 'input' → pin used to count pulses</li> <li>- 'subID' → DAC i2c addr</li> </ul>

## subscribe

BASE_TOPIC/noise/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "status" }</pre>
change sensitivity order	<pre>{   'dest' : &lt;ID&gt;,   'order' : "sensitivity",   'value' : &lt;integer 0 to 100%&gt; }</pre>
change noise limit threshold order	<pre>{</pre>

(i.e pulse count limit)	<pre>'dest' : &lt;ID&gt;, 'order' : "threshold", 'value' : &lt;integer&gt; }</pre>
immediate acquisition order	<pre>{ 'dest' : &lt;ID&gt;, 'order' : "acquire" }</pre>

'order' command possible *actions*:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>sensitivity</b>	set new value to DAC output used as input to the comparator
<b>threshold</b>	set noise limit through a maximum number of pulses count across the whole sliding windows
<b>acquire</b>	force immediate delivery of sensor value(s).

*Note: there's no 'frequency' order because value delivery is not dependent on a timer.*

## lighting

Like all actuators, its setup is defined at the sensOCampus level.

This actuator drives various lighting command systems like **telerupteur** or **directly connected** lights sources.

### publish

BASE_TOPIC / lighting	JSON frame
status	<p>is published on request <b>and</b> upon light event (on, off)</p> <pre>{   'unitID' : &lt;ID&gt;,   'status': '[ON   OFF   unknown]' }</pre>

### subscribe

BASE_TOPIC/lighting/command	JSON frame
order	<pre>{   'dest' : &lt;ID&gt;,   'order' : '[ ON   OFF ] or status'   &lt;optional fields&gt; }</pre> <p>optional fields may contain            - 'value' : '&lt;0 to 100&gt;' → percentage of luminosity</p>

'order' command possible **actions**:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>ON or OFF</b>	<p>set output to ON or OFF.</p> <p><i>Note: if teleruptor type, any order will just toggle the output (i.e we don't know whether it is on or off)</i></p> <p><i>Note: for variable lighting systems, an additional 'value' field may contains an integer ranging from 0 to 100 (percents)</i></p>

**dali**



## shutter

Like all actuators, its setup is defined at the sensOCampus level.

This actuator is able to drive two kinds of shutters (blinds): **wired** and **wireless blinds** (difference is the way outputs are activated ---i.e short pulses for wireless).

### publish

BASE_TOPIC / shutter	JSON frame
status	<p>is published on request <b>and</b> upon shutter event</p> <pre>{   'unitID' : &lt;ID&gt;,   'status' : '[CLOSED   OPENED   UNKNOWN]',   'order' : '[UP   DOWN   STOP   UNKNOWN]' }</pre> <p>'status' field reflect current state of the shutter 'order' field is the action currently undertaken</p>

### subscribe

BASE_TOPIC/shutter/command	JSON frame
order	<pre>{   'dest' : &lt;ID&gt;,   'order' : '[ UP   DOWN   STOP ] or status' }</pre>

'order' command possible **actions**:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>UP DOWN STOP</b>	Set action to open, close or stop shutter in its current position

## display

This kind of actuator is able to display some web pages. Users can send a list of web pages that will get displayed according to a scheduling based on a timer value. This timer value may get changed along with others parameters like time\_on and time\_off that define when to switch ON and when to switch OFF the display itself.

## publish

BASE_TOPIC / display	JSON frame
status	<p>is published on request <b>and</b> upon page change <b>and</b> upon order received <b>and</b> upon power mode change</p> <pre>{   'unitID' : &lt;ID&gt;,   'status' : '[ OK   KO ]',   'pwr_status' : '[ ON   OFF   UNKNOWN                     FORCEON   FORCEOFF ]',   'frequency' : '&lt;web pages timeout&gt;',   'time_on' : '&lt;when to set ON&gt;',   'time_off' : '&lt;when to set OFF&gt;',   'days_on' : '&lt;list of active days&gt;',   'cur_url' : '&lt;currently displayed url&gt;',   'def_url' : '&lt;True   False&gt;' }</pre> <p>'status' field reflect browser's status (alive/dead)            'pwr_status' field reflect video output status            'frequency' field is the time a web page is displayed            'time_on' field is when we switch ON video (minutes of day)            'time_off' field is when we switch OFF video (minutes of day)            'days_on' list that starts with 1 --&gt; monday            'cur_url' field is the currently displayed web page (will get truncated to a maximum value)            'def_url' tells whether we display the default urls list</p>

## subscribe

BASE_TOPIC/display/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : 'status' }</pre>
order to set mode	<pre>{   'dest' : &lt;ID&gt;,   'order' : 'mode',   'value' : '[ NORMAL   FORCEON   FORCEOFF ]' }</pre>

order to set web pages frequency	{ 'dest' : <ID>, 'order' : 'frequency', 'value' : <integer> }
order to set URLs list	{ 'dest' : <ID>, 'order' : 'url', 'value' : 'url' or [ url1, url2, ... urlx ] }
order to set 'time_on' events	{ 'dest' : <ID>, 'order' : 'time_on', 'value' : "06:45" or "1-5 06:45" or "1,3,4 09:00" ... }
order to set 'time_off' events	{ 'dest' : <ID>, 'order' : 'time_off', 'value' : "19:30" }

'order' command possible **actions**:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>mode</b>	Set display mode. At startup, we're in <b>NORMAL</b> mode (i.e ON or OFF). If mode is set to <b>FORCEON</b> , the display will switch ON and will then automatically switch back to normal mode on next <i>'time_on'</i> event. If set to <b>FORCEOFF</b> , the display will stay OFF until the next <b>reboot!</b> or if you switch back to another mode.
<b>frequency</b>	set timeout (seconds) before changing web page to display
<b>url(s)</b>	Either set a single url (i.e string) or a list of urls
<b>time_on</b>	Kind of 'crontab' value: - hours:minutes - time of days (e.g 1-5) + hours:minutes e.g: "1-5 7:30"
<b>time_off</b>	hours:minutes to switch OFF video output e.g: "19:30"

## access

This topic is dedicated to access control systems. These systems are usually installed on doors for building rooms or related to external gates when they're involved in vehicle access authorisation.

- end-device: **publish** to **BASE\_TOPIC / access**
- end-device: **subscribe** to **BASE\_TOPIC / access / command**

## publish

BASE_TOPIC / access	JSON frame
status	<p><i>is published upon <b>status order</b> received</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'status' : '[ OK   KO ]',   &lt;others&gt; }</pre> <p><i>&lt;others&gt; may be if a camera has been detected, which NFC reader is installed etc etc. See accessOCampus developer guide.</i></p>
access	<p><i>is published upon a USER applying to an access</i></p> <pre>{   'unitID' : &lt;ID&gt;,   'seq_id' : '&lt;access seq. number&gt;',   'auth_type' : &lt;see accessOCampus doc&gt;,   'nfc_uid' : &lt;see accessOCampus doc&gt;,   'passcode' : &lt;see accessOCampus doc&gt;,   'thermal_detect' : &lt;see accessOCampus doc&gt;,   'image' : &lt;see accessOCampus doc&gt;, }</pre> <p><i>See accessOCampus developer guide for fields details.</i></p>

## subscribe

BASE_TOPIC/access/command	JSON frame
send status order	<pre>{   'dest' : &lt;ID&gt;,   'order' : '<b>status</b>' }</pre>
grant access order (i.e door/gate will open)	<pre>{   'dest' : &lt;ID&gt;,   'seq_id' : &lt;from access request seq_id field&gt;,   'order' : '<b>grant</b>' }</pre>
deny access order	<pre>{</pre>



(i.e door/gate will remain closed)	'dest' : <ID>, 'seq_id' : <from access request seq_id field>, 'order' : 'deny' }
ask_code order (people has not been recognized by the camera → ask for code)	{ 'dest' : <ID>, 'order' : 'ask_code' }
force_open order	{ 'dest' : <ID>, 'order' : 'force_open' }
force_close order	{ 'dest' : <ID>, 'order' : 'force_close' }
normal mode order (to cancel previous force_xxx orders)	{ 'dest' : <ID>, 'order' : 'normal' }

'order' command possible *actions*:

<b>status</b>	force immediate delivery of a status report to its class topic
<b>grant</b>	subsequently to an 'access request', will authorize access
<b>deny</b>	subsequently to an 'access request', will deny access
<b>ask_code</b>	people not recognized (camera), ask for an additional code
<b>force_open</b>	special_mode: system remains open (e.g journée portes ouvertes)
<b>force_close</b>	special_mode: system remains closed (e.g burglar emergency)
<b>normal</b>	end of 'special_mode': go back to regular ops

# Annexe - A

## A - 1 ESP8266 credentials sample code

```
bool _http_get( const char *url, char *buf, size_t bufsize, const char *login, const char
*passwd ) {

    HTTPClient http;

    http.begin(url);
    log_debug(F("\n[HTTP] GET url : ")); log_debug(url); log_flush();

    // authentication ?
    if( login!=NULL and passwd!=NULL ) {
        http.setAuthorization( login, passwd);
    }

    // perform GET
    int httpCode = http.GET();

    // connexion failed to server ?
    if( httpCode < 0 ) {
        log_error(F("\n[HTTP] connexion error code : ")); log_debug(httpCode,DEC); log_flush();
        return false;
    }

    // check for code 200
    if( httpCode == HTTP_CODE_OK ) {
        String payload = http.getString();
        snprintf( buf, bufsize, "%s", payload.c_str() );
    }
    else {
        log_error(F("\n[HTTP] GET retcode : ")); log_debug(httpCode,DEC); log_flush();
    }

    // close connexion established with server
    http.end();

    yield();

    return ( httpCode == HTTP_CODE_OK );
}
```

```
// HTTP get
bool http_get( const char *url, char buf[], size_t bufsize ) {
    return _http_get( url, buf, bufsize, NULL, NULL );
}

// HTTP get with credentials
bool http_get( const char *url, char *buf, size_t bufsize, const char *login, const char
*passwd ) {
    return _http_get( url, buf, bufsize, login, passwd );
}
```

## A - 2 sensOCampus configuration U4/302

```
[
  {
    "topic": "u4/302",
    "modules":
    [
      {
        "module": "Shutter",
        "unit": "front",
        "params":
        [
          {
            "param": "shutterType",
            "value": "wired"
          },
          {
            "param": "courseTime",
            "value": 20
          },
          {
            "param": "upOutput",
            "value": 100
          },
          {
            "param": "downOutput",
            "value": 101
          }
        ]
      },
      {
        "module": "Shutter",
        "unit": "center",
        "params":
        [
          {
            "param": "shutterType",
            "value": "wired"
          },
          {
            "param": "courseTime",
            "value": 20
          },
          {
            "param": "upOutput",
            "value": 102
          },
          {
            "param": "downOutput",
            "value": 103
          }
        ]
      },
      {
        "module": "Shutter",
        "unit": "back",
        "params":
        [
          {
            "param": "shutterType",
            "value": "wired"
          },
          {
            "param": "courseTime",
            "value": 20
          },
          {
            "param": "upOutput",
            "value": 104
          }
        ]
      }
    ]
  }
]
```

```

        },
        {
            "param": "downOutput",
            "value": 105
        }
    ]
},
{
    "module": "Digital",
    "unit": "inside",
    "params":
    [
        {
            "param": "frequency",
            "value": 0
        },
        {
            "param": "subIDs",
            "value": [
                "i1ot1",
                "i1ot2",
                "i1ot3",
                "window"
            ]
        },
        {
            "param": "inputs",
            "value": [
                101,
                106,
                111,
                115
            ]
        },
        {
            "param": "types",
            "value": [
                "presence",
                "presence",
                "presence",
                "open_close"
            ]
        }
    ]
},
{
    "module": "Luminosity",
    "unit": "inside",
    "params":
    [
        {
            "param": "frequency",
            "value": 0
        },
        {
            "param": "subIDs",
            "value": [
                "i1ot1",
                "i1ot2",
                "i1ot3"
            ]
        },
        {
            "param": "inputs",
            "value": [
                100,
                105,
                110
            ]
        },
        {
            "param": "min",
            "value": [

```

```

        0,
        0,
        0
    ],
    {
        "param": "max",
        "value": [
            1000,
            1000,
            1000
        ]
    },
    {
        "param": "units",
        "value": [
            "",
            "",
            ""
        ]
    }
]
},
{
    "module": "Luminosity",
    "unit": "outside",
    "params": [
        {
            "param": "frequency",
            "value": 60
        },
        {
            "param": "subIDs",
            "value": [
                "ouest"
            ]
        },
        {
            "param": "inputs",
            "value": [
                116
            ]
        },
        {
            "param": "min",
            "value": [
                0
            ]
        },
        {
            "param": "max",
            "value": [
                1400
            ]
        },
        {
            "param": "units",
            "value": [
                "w/m2"
            ]
        }
    ]
},
{
    "module": "Temperature",
    "unit": "inside",
    "params": [
        {
            "param": "frequency",
            "value": 0
        },
    ]
}

```

```

        {
            "param": "subIDs",
            "value": [
                "ilot1",
                "ilot2",
                "ilot3"
            ]
        },
        {
            "param": "inputs",
            "value": [
                103,
                108,
                113
            ]
        },
        {
            "param": "min",
            "value": [
                5,
                5,
                5
            ]
        },
        {
            "param": "max",
            "value": [
                40,
                40,
                40
            ]
        },
        {
            "param": "units",
            "value": [
                "",
                "",
                ""
            ]
        }
    ],
    {
        "module": "Temperature",
        "unit": "outside",
        "params": [
            {
                "param": "frequency",
                "value": 0
            },
            {
                "param": "subIDs",
                "value": [
                    "ouest"
                ]
            },
            {
                "param": "inputs",
                "value": [
                    117
                ]
            },
            {
                "param": "min",
                "value": [
                    0
                ]
            },
            {
                "param": "max",
                "value": [
                    50
                ]
            }
        ]
    }

```

```

        ],
        {
            "param": "units",
            "value": [
                ""
            ]
        }
    ],
    {
        "module": "Humidity",
        "unit": "inside",
        "params": [
            {
                "param": "frequency",
                "value": 0
            },
            {
                "param": "subIDs",
                "value": [
                    "ilot1",
                    "ilot2",
                    "ilot3"
                ]
            },
            {
                "param": "inputs",
                "value": [
                    104,
                    109,
                    114
                ]
            },
            {
                "param": "min",
                "value": [
                    30,
                    30,
                    30
                ]
            },
            {
                "param": "max",
                "value": [
                    80,
                    80,
                    80
                ]
            },
            {
                "param": "units",
                "value": [
                    "",
                    "",
                    ""
                ]
            }
        ]
    },
    {
        "module": "Humidity",
        "unit": "outside",
        "params": [
            {
                "param": "frequency",
                "value": 0
            },
            {
                "param": "subIDs",
                "value": [

```



```

        "ouest"
    ],
    {
        "param": "inputs",
        "value": [
            118
        ]
    },
    {
        "param": "min",
        "value": [
            0
        ]
    },
    {
        "param": "max",
        "value": [
            100
        ]
    },
    {
        "param": "units",
        "value": [
            ""
        ]
    }
]
},
{
    "module": "CO2",
    "unit": "inside",
    "params": [
        {
            "param": "frequency",
            "value": 0
        },
        {
            "param": "subIDs",
            "value": [
                "ilot1",
                "ilot2",
                "ilot3"
            ]
        },
        {
            "param": "inputs",
            "value": [
                102,
                107,
                112
            ]
        },
        {
            "param": "min",
            "value": [
                0,
                0,
                0
            ]
        },
        {
            "param": "max",
            "value": [
                2000,
                2000,
                2000
            ]
        },
        {
            "param": "units",
            "value": [

```

